

CP 135 EX manual call point

SIL2 compliant as IEC 61508 & IEC 61511





The flameproof CP135 manual call point is ATEX / IECEx certified for use in potentially explosive atmospheres. It can be used in conjunction with a fire alarm system will activate alarms to alert personnel to potential dangers, help signal the need for immediate action in emergency situations and more. Also known as explosion proof fire alarm call point, manual call point (MCP) or “Break Glass” call point.

ATEX / IECEx Certification: ATEX Zone 1 and Zone 2 Certified for group IIB +H² gas / vapour applications and Zone 21 and Zone 22 compliant for dust / powder applications. SIL2 compliant as IEC 61508 & IEC 61511.

Application: Oil and gas, chemical, petrochemical, pharmaceutical, marine and offshore applications

Key features: Robust and highly reliable, this Ex manual call point (MCP) / Break Glass call point is designed for corrosive environments and hazardous areas. The housing is moulded in Glass-Reinforced Polyester (GRP), protected by an UV resistant paint. These ATEX / IECEx compliant manual call points / “Break Glass” call points are compatible with PLC, ESD and DCS systems. There is a built in test function.

Options: Visualisation functions, line detection, glass protection and hammer are optional. A range of accessories is available to customise this ATEX / IECEx manual call point / “Break Glass” call point. These include pipe mounting brackets, sunshades, tag and duty labels and other accessories.

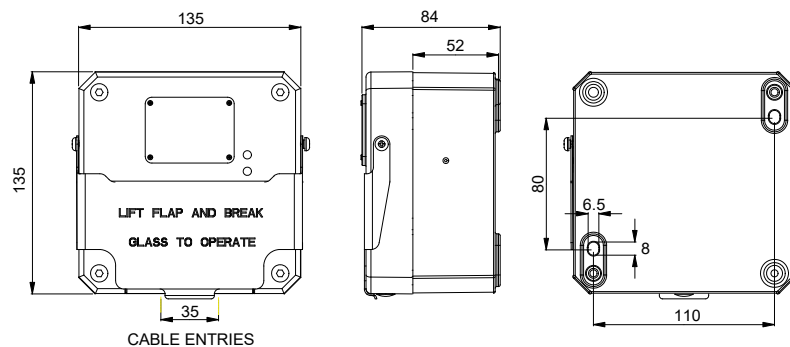



Phone: +44 (0)1752 333 933 | E-mail: sales@ex-techsignalling.com | Website: www.ex-techsignalling.com

Ex-tech Signalling Bell Close, Plympton, Devon, PL7 4JH, UK

Please note that whilst effort has been made to ensure the accuracy of this datasheet. Ex-tech Signalling will not assume liability for the use thereof. Ex-tech Signalling reserves the right to improve specifications without prior notice, please refer to our website for updated information or contact our local sales representative.

CP 135 EX manual call point

SIL2 compliant as IEC 61508 & IEC 61511

MATERIAL	• Enclosure: Glass-Reinforced Polyester (GRP)		
COLOUR	• RED : RAL3001/3028 • BLACK : RAL9005 • ORANGE : RAL2010	• YELLOW : RAL1018 • GREEN : RAL6032 • YELLOW WITH BLACK STRIPES : RAL1018 + RAL1005	• BLUE : RAL5005 • GREY : RAL7038
INGRESS PROTECTION	• IP66/67		
AMBIENT TEMPERATURE FOR OPERATION	• T6 = - 40°C ~ + 55°C , T5 = - 40°C ~ + 60°C, T4 = - 40°C ~ + 70°C		
CERTIFICATION	• Nemko 13 ATEX 1568X, IECEX NEM 13.0038X		
EX CODE	 • II 2 GD Ex d IIB + H2 T6 Gb • Ex tb IIIC T85°C		
STANDARD	• EN / IEC 60079-0, EN / IEC 60079-1, EN / IEC 60079-31 / EN 54-11		
ATEX AREA ZONE	• Gas zone: 1 & 2 Dust zone: 21 & 22		
AMBIENT HUMIDITY*	• up to 95%		
RATED IMPULSE WITHSTAND VOLTAGE	• 1 kV according to IEC 61000-4-5		
CONTACT TYPE	• 1x C/O or 2x C/O (1)		
RATING	• AC 125/250 V (50/60Hz) =11A*** ; 30V DC = 6A***; 125 V DC = 0,3A***; 250 V DC = 0,6A***		
MINIMUM VOLTAGE AND CURRENT	• DC 5V 10mA		
SHORTS CIRCUIT PROTECTION	• 10 A gG		
CABLES ENTRY	• 2 x M20, 1 x M25 + 1 x M20, 1 x 1/2" NPT + 1 x M20, 1 x 3/4" NPT + 1 x M20		
TERMINAL	• From 22 to 14 AWG - from 0.50 mm ² to 2.5 mm ²		
NET WEIGHT	• 2.0 Kg		
LINE RESISTOR**	• 470 Ohms**	• 1 Watt	
SIGNALLING LED**	• Green U =24VDC I= 10 mA ; Red U=24V DC I = 20mA		

* = without runoff - ** = optional - *** = resistive load - cable gland and blind plug not provided

Phone: +44 (0)1752 333 933 | E-mail: sales@ex-techsignalling.com | Website: www.ex-techsignalling.com

Ex-tech Signalling Bell Close, Plympton, Devon, PL7 4JH, UK

Please note that whilst effort has been made to ensure the accuracy of this datasheet. Ex-tech Signalling will not assume liability for the use thereof. Ex-tech Signalling reserves the right to improve specifications without prior notice, please refer to our website for updated information or contact our local sales representative.

CP 135 EX manual call point

SIL2 compliant as IEC 61508 & IEC 61511

Product	Certification	Switches	Duty label	Tag label	LED indicator	Features	Connection	Entry position	Housing
CP	135	S	N	Y	L	FRD	A	T	RD



CP	= CALL POINT
135	= HAZARDOUS AREA
136	= NON-CERTIFIED
S	= 1
D	= 2
Y	= YES (SEE LIST)
N	= NO
Y	= YES
N	= NO
L	= RED & GREEN
R	= RED
G	= GREEN
N	= NO LED
F	= LIFT FLAP
R	= RESISTOR(S)
D	= DIODE(S)
N	= NO FEATURES

RD	● = RED (STD)
YW	● = YELLOW
BU	● = BLUE
BL	● = BLACK
GN	● = GREEN
GY	● = GREY
YB	● = YELLOW & BLACK
OJ	● = ORANGE
OR	○ = OTHER
T	= TOP
B	= BOTTOM
A	= 2 x M20 x 1.5
B	= 1 x M25 x 1.5 + 1 x M20 x 1.5
C	= 1 x 1/2" NPT + 1 x M20 x 1.5
D	= 1 x 3/4" NPT + 1 x M20 x 1.5
Additional adaptors can be supplied as well as blanking plugs and cable glands, see below.	

CONDUIT ACCESSORIES	
M20 316L St. St Exd conduit plug	SPARE3060009
M25 St. St. conduit adaptor	SPARE3060105
1/2" NPT St. St. conduit adaptor	SPARE3060108
3/4" NPT St. St. conduit adaptor	SPARE3060107
St. St Exd cable gland 7-12mm	SPARE3060108
St. St Exd cable gland 10-16mm	SPARE3060109

CONDUIT ACCESSORIES	
M20 NPB Exd conduit plug	SPARE3060008
M25 NPB conduit adaptor	SPARE3060003
1/2" NPT NPB conduit adaptor	SPARE3060001
3/4" NPT NPB conduit adaptor	SPARE3060002
NPB Exd cable gland 7-12mm	SPARE3060019
NPB Exd cable gland 10-16mm	SPARE3060018