

**RED SKY**  
SERIOUSLY SAFE LIGHTS™

**daly**  
Middle East

# ROUND X2 SERIES

AC VERSION

**LED LIGHTING FOR HARSH AND HAZARDOUS AREAS**

**AREA & LOWBAY**



**Reliable. Durable. Efficient.**  
**4,000 to 12,000 lumen models**

## ABOUT RED SKY LIGHTING

# PIONEERING INDUSTRIAL ILLUMINATION FOR HARSH & HAZARDOUS CONDITIONS

- A leading manufacturer of premium LED lights for demanding work conditions
- Headquartered in California, products assembled in the USA
- Servicing global clients across 4 continents in metal processing, oil & gas, marine, manufacturing
- Renowned for quality, dependability, client care and uncompromising safety standards



## WHY CHOOSE RED SKY

### 🔥 SERIOUSLY SAFE LIGHTS

- Rigorously tested in our professional labs
- Surpassing industry certifications and safety protocols
- Crafted with highest grade components for maximum durability

### 🔥 FAST DELIVERY

- Majority of orders delivered within 14 days
- Same day shipping for products in stock
- Real-time order tracking for full transparency

### 🔥 TOP-NOTCH SERVICES

- Team of experts for seamless support
- Energy audit services, lighting simulation services
- Hassle-free return policy and management

### 🔥 SUSTAINABLE SOLUTIONS

- High luminous efficacy LEDs for energy savings
- Conscious product design
- Recyclable materials for products and packaging


📞 +971 4 887 2049    ✉️ sales@daly-me.com

🌐 www.daly-me.com    🌐 @daly-middle-east

**daly**  
Middle East



## **FEATURES**

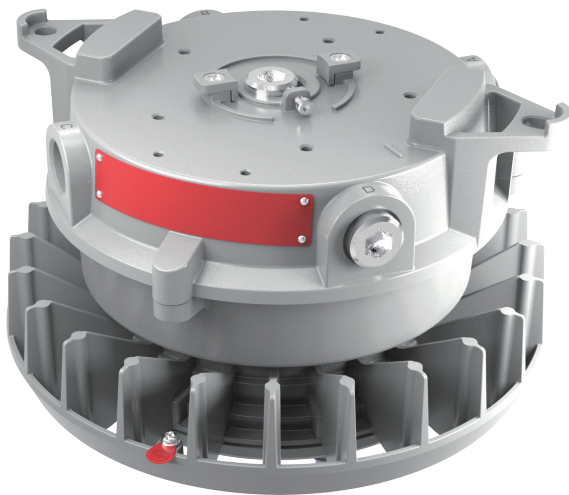

### **Safe and reliable performance**

Safe and reliable heat transfer-Offering a T-rating of T6 (Zone 2) / T85°C (Zone 21), LED Life L70>150,000hrs of maintenance-free operation

### **3 Choices of Light Distributions**

60° / 110° / 180° available for different applications from spot to flood for optimal light distribution

## **RATINGS**

Zone 2,21  
IP66  
IK08

## **CERTIFICATIONS**

IECEX  
Ex ec nC nR IIC T4 Gc;Ex tb IIIC T110°C Db (65W/75W)  
Ex ec nC nR IIC T6 Gc ;Ex tb IIIC T85°C Db (25W/45W)  
-40°C≤Tamb≤+55°C

 +971 4 887 2049       sales@daly-me.com

 www.daly-me.com       @daly-middle-east

**daly**  
Middle East


# TECHNICAL PARAMETERS

Specification	RND-25-100-240	RND-45-100-240	RND-65-100-240	RND-75-100-240
<b>Electrical Parameters</b>				
Power	25W	45W	65W	75W
Voltage/Frequency	100-240V AC 50/60Hz			
Power Factor	>90%			
THD	<20%			
L70	150,000 Hours@55°C			
Dimming	0-10V			
Surge Protection	6KV			
Warranty	LEDs: 10 years, Driver: 5 years			
<b>Optical Parameters</b>				
Lumen Output*	4,036Lm	7,129Lm	10,405Lm	11,758Lm
Lumen Efficacy*	150Lm/W			
Available Beam Angle	60° / 110° / 180°			
Correlated Color Temperature (CCT)	4000K/5700K			
Color Rendering Index (CRI)	Ra>70			
<b>Mechanical Parameters</b>				
Finish	Thermoset Powdercoat			
Hardware	Stainless steel 316			
Lens Material	Tempered Glass			
Mounting Options	Pendant, Yoke, Wall, Stanchion, Pole			
Product Weight	10.6lbs / 4.8kg			
Cable Entry	(5) 3/4" NPT			
Product Dimensions(LxWxH)	10.6x10.3x6in (269.4x262x151.7mm)			
<b>Environmental Parameters</b>				
Ambient Operating Temperature	-40°C ~ +55 °C			
T-Code Rating	Gas – T6; Dust – 85°C		Gas – T4; Dust – 110°C	

\* Value calculated based on 5700K and Clear glass ,varies to different spec.

# ORDERING INFORMATION

**EXAMPLE:** RND-45-100-240-57-110-X2-CG-GRY-PDCG

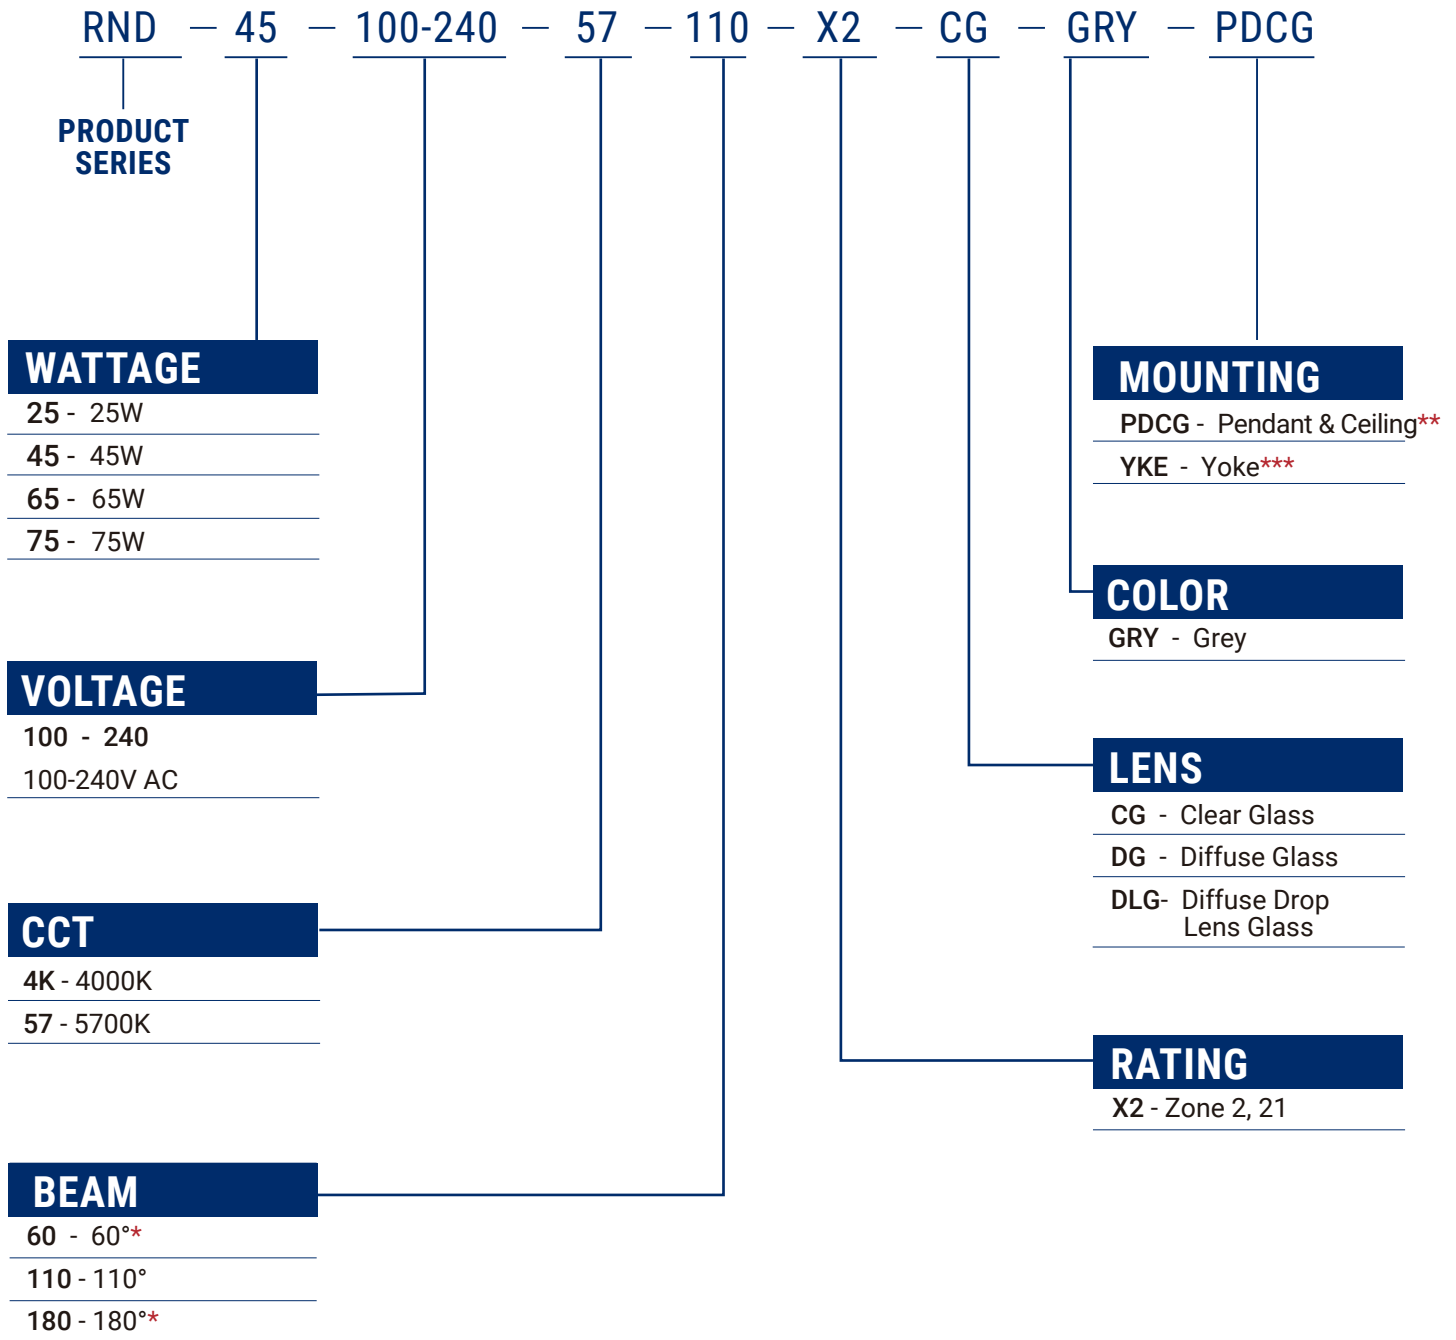


\* 60° only with Clear Glass, 180° only with Diffuse Drop Lens Glass

\*\* No accessory required for Pendant & Ceiling Mount

\*\*\* RND-YOKE Pre-installed as standard


# MOUNTING ACCESSORIES

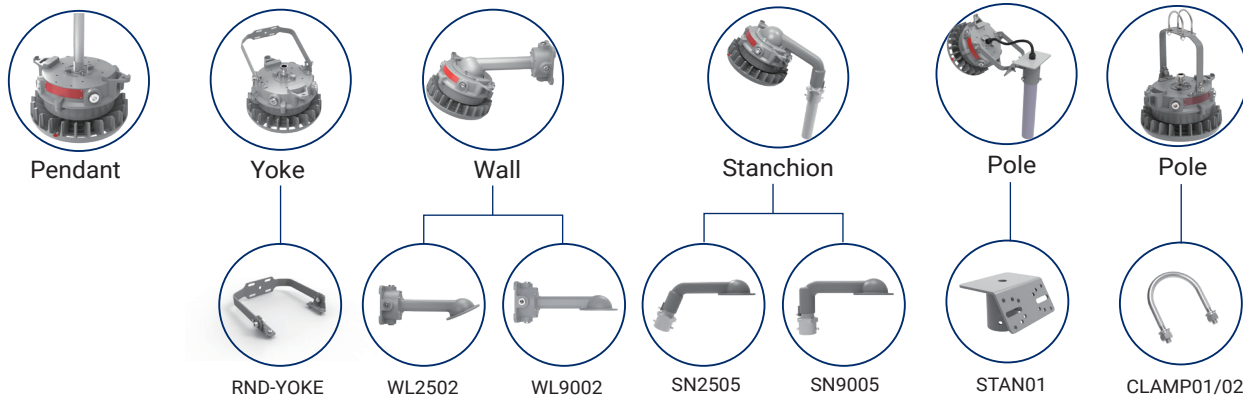

Mounting Method	PN	Description	MPN Code
Yoke	RND-YOKE	YOKE Mount, RND SERIES, SS304, Power Coated Grey RAL7037	309050029
Stanchion	SN2505	Stanchion Mount 25 Degree, Power Coated Grey RAL7037	309050314
	SN9005	Stanchion Mount 90 Degree, Power Coated Grey RAL7037	309050315
Wall	WL2502	WALL MOUNT 25 DEGREE, Power Coated Grey RAL7037	309050317
	WL9002	WALL MOUNT 90 DEGREE, Power Coated Grey RAL7037	309050316
Pole	STAN01*	Slip-Fit Stanchion Mount Kit, M25, SS304, Power Coated Grey RAL7037	309050300
	CLAMP01	Pipe Clamp Kit for Round pole $\Phi$ 1 7/8(48mm), SS304	309050047
	CLAMP02	Pipe Clamp Kit for Round pole $\Phi$ 2 3/8(60mm), SS304	309050046

\* Requires A Yoke Mount

# OTHER ACCESSORIES

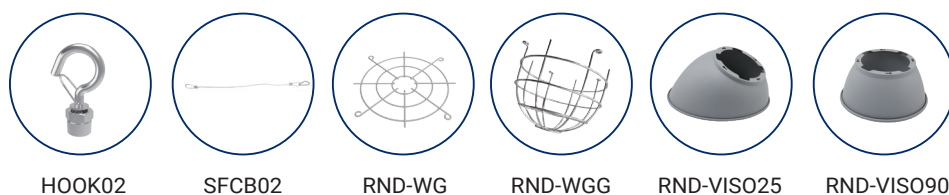

PN	Description	MPN Code
HOOK02	M10 Hook with 3/4" NPT(SUS316)	309050331
SFCB02	Safety Cable Kit, RND &BLM&LNT&LNT EM SERIES, SS304	309050058
RND-WG	Wire guard, RND SERIES, SS304	310010109
RND-WGG	Wire guard for Globe lens, RND SERIES, SS304	309050143
RND-VISO25	VISOR 25°, RND SERIES, Aluminium alloy, Power Coated Grey RAL7037	101050008
RND-VISO90	VISOR 90°, RND SERIES, Aluminium alloy, Power Coated Grey RAL7037	101050009

+971 4 887 2049 sales@daly-me.com




www.daly-me.com @daly-middle-east

# LUMEN TABLE

PN	Wattage (W)	CCT	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
<b>Voltage 100-240V AC</b>						
RND-25-100-240-57-60-X2-CG-GRY-YKE	25	5700K	60°	Clear Glass	4,295	168
RND-25-100-240-57-110-X2-CG-GRY-YKE	25	5700K	110°	Clear Glass	4,036	161
RND-25-100-240-57-180-X2-DLG-GRY-YKE	25	5700K	180°	Drop Lens Glass	3,268	130
RND-45-100-240-57-60-X2-CG-GRY-YKE	45	5700K	60°	Clear Glass	7,523	170
RND-45-100-240-57-110-X2-CG-GRY-YKE	45	5700K	110°	Clear Glass	7,129	161
RND-45-100-240-57-180-X2-DLG-GRY-YKE	45	5700K	180°	Drop Lens Glass	5,714	129
RND-65-100-240-57-60-X2-CG-GRY-YKE	65	5700K	60°	Clear Glass	10,958	170
RND-65-100-240-57-110-X2-CG-GRY-YKE	65	5700K	110°	Clear Glass	10,405	159
RND-65-100-240-57-180-X2-DLG-GRY-YKE	65	5700K	180°	Drop Lens Glass	8,351	127
RND-75-100-240-57-60-X2-CG-GRY-YKE	75	5700K	60°	Clear Glass	12,638	169
RND-75-100-240-57-110-X2-CG-GRY-YKE	75	5700K	110°	Clear Glass	11,758	157
RND-75-100-240-57-180-X2-DLG-GRY-YKE	75	5700K	180°	Drop Lens Glass	9,434	125

For additional information, please contact your sales representative.

# PHOTOMETRIC

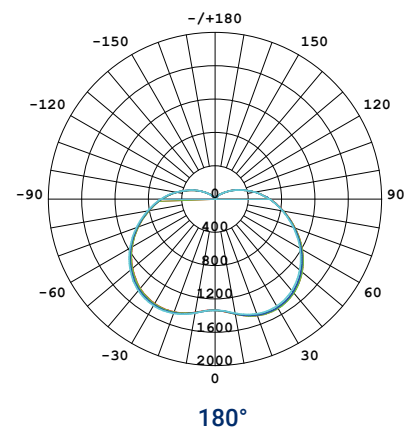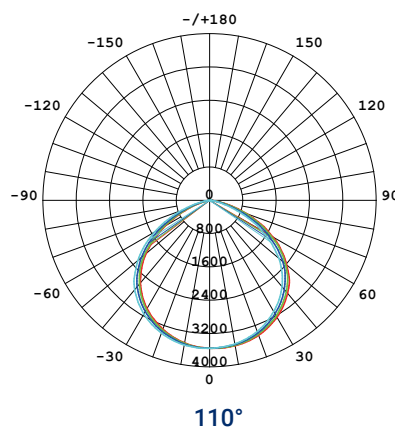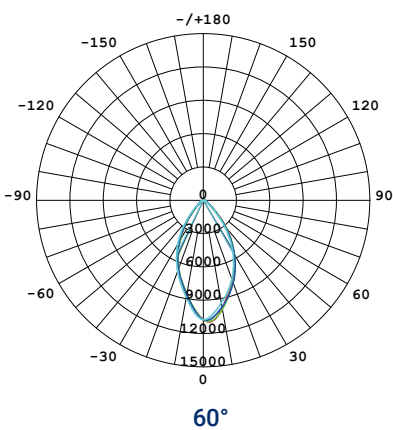



+971 4 887 2049    sales@daly-me.com

www.daly-me.com    @daly-middle-east






# DIMENSIONS

unit: in(mm)

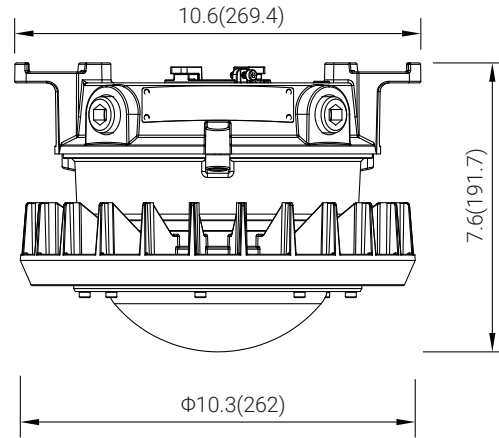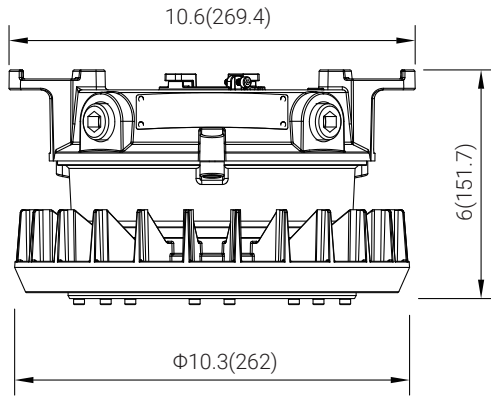

Pendant

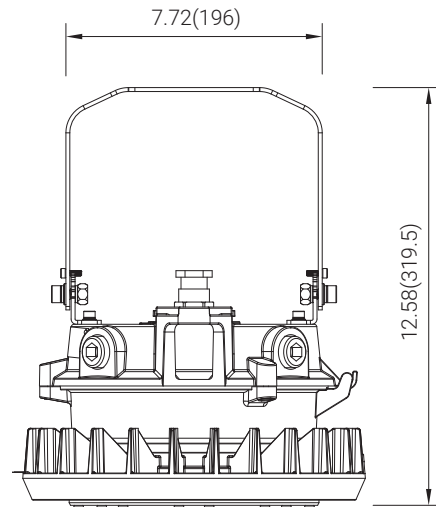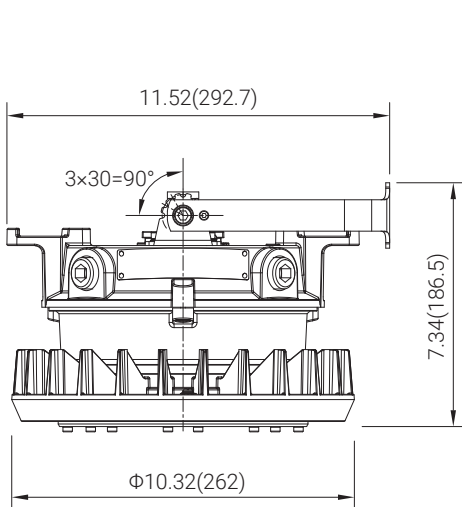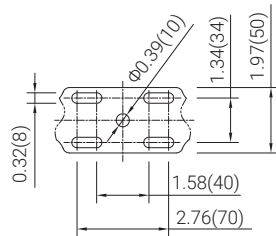

Yoke



+971 4 887 2049 sales@daly-me.com

www.daly-me.com @daly-middle-east

daly  
Middle East

# DIMENSIONS

unit: in(mm)

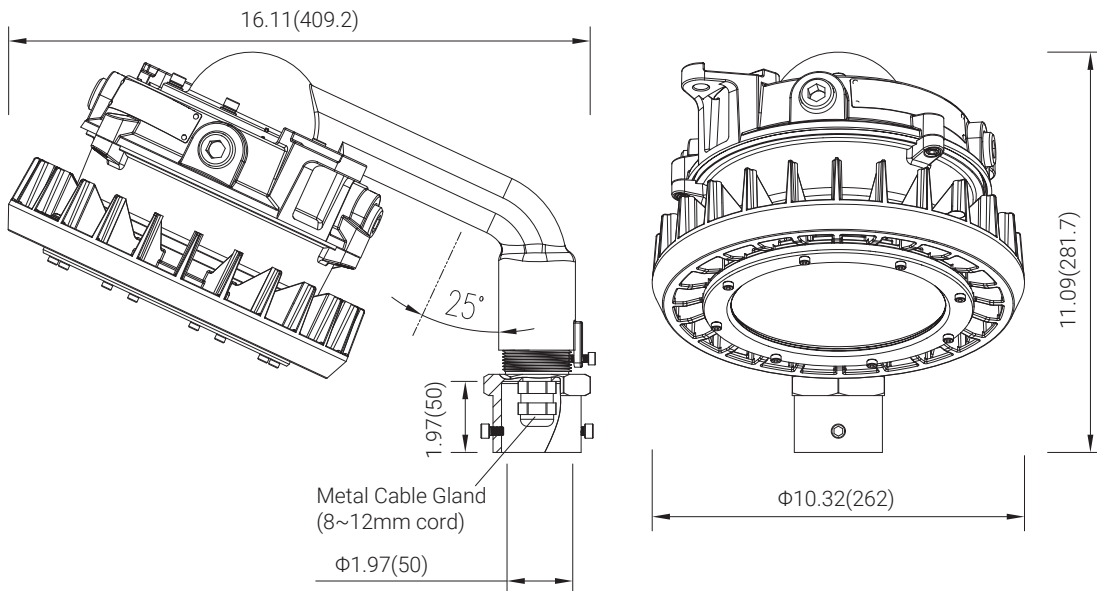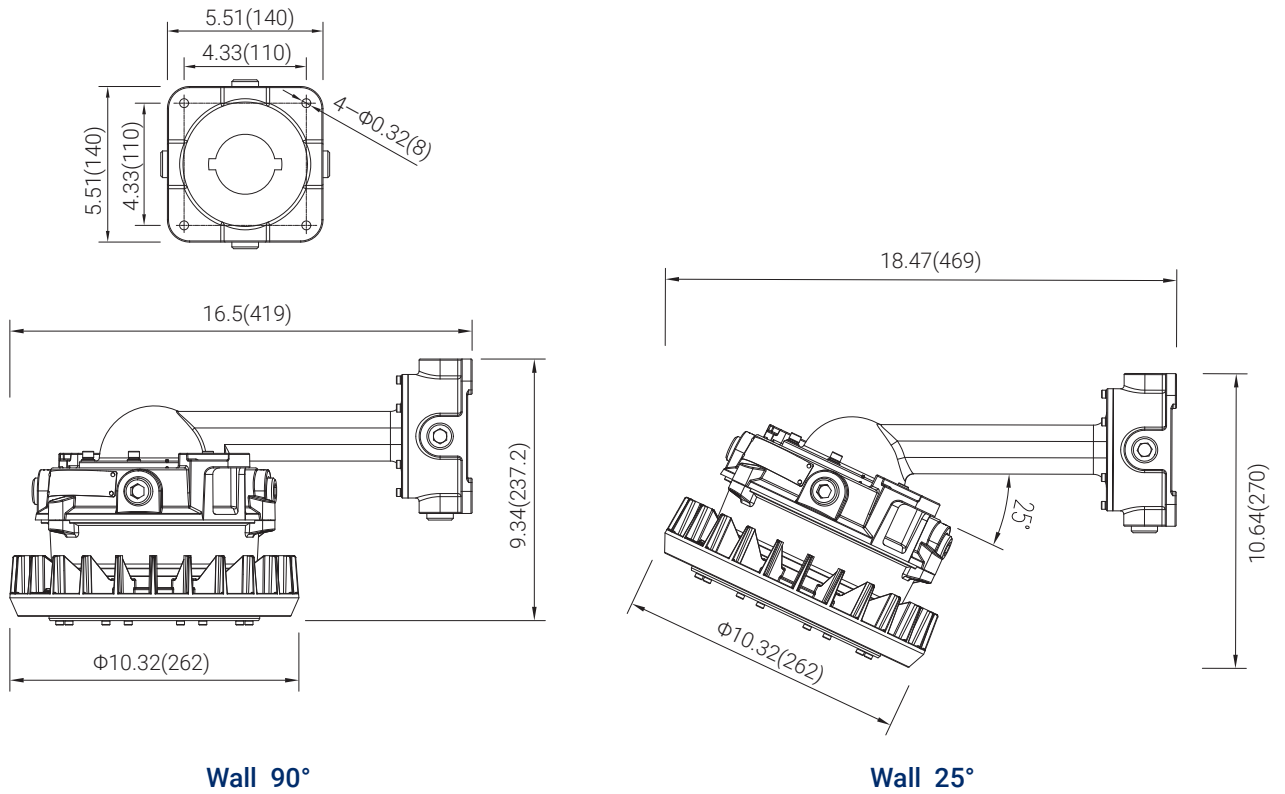


Stanchion 25°


+971 4 887 2049 sales@daly-me.com

www.daly-me.com @daly-middle-east

unit: in(mm)

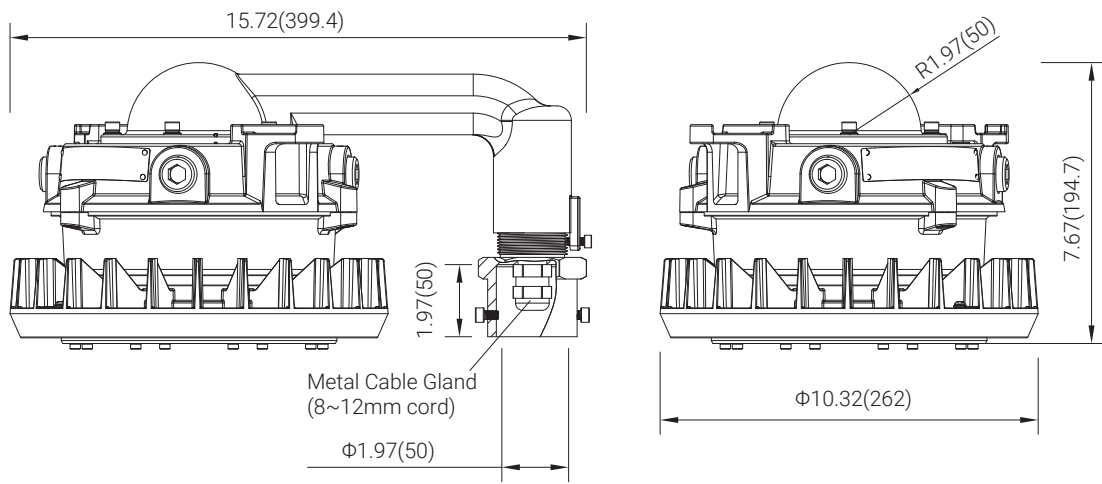


Stanchion 90°

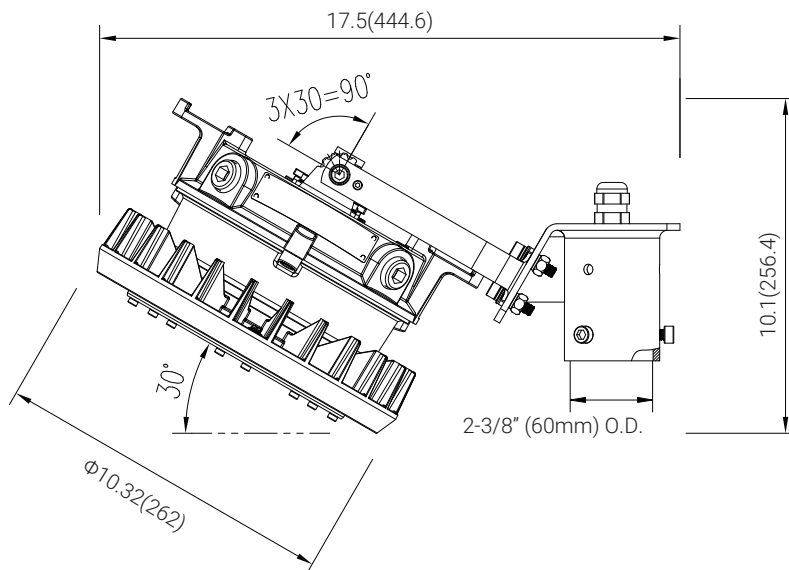

Pole  
STAN01

# DIMENSIONS

unit: in(mm)

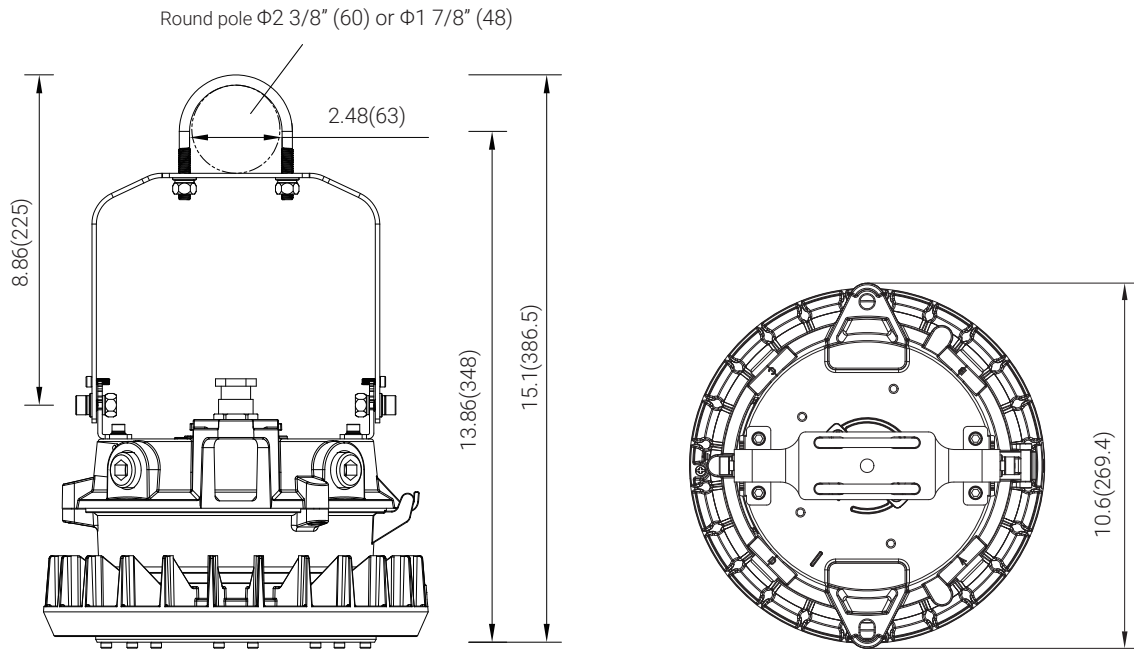

Pole  
CLAMP01/02

# HAZARDOUS LOCATION LIGHTING BASICS

## Atmosphere Groups

## Temperature Classification

Substance	Hazard Class	Division Groups	Zone Groups	Max. Surface Temperatures	NEC® 500 CEC®	NEC® 500/IEC-Group II
Acetylene	Class I Flammable Gases	Group A	IIC	450(842)	T1	T1
Hydrogen		Group B	IIC	300(572)	T2	
Ethylene		Group C	IIB	280(536)	T2A	T2
Propane		Group D	IIA	260(500)	T2B	
Methane		Group D	IIA <sup>2</sup>	230(446)	T2C	
Combustible Metal Dusts	Class II Combustible Dusts	Group E <sup>1</sup>	IIIC <sup>3</sup>	215(419)	T2D	T3
Combustible Carbonaceous Dust		Group F	IIIB <sup>3</sup>	200(392)	T3	
Combustible Dusts not in Group E or F (Flour, Grain, Wood, Plastics, Chemicals)		Group G	IIIB <sup>3</sup>	180(256)	T3A	
Combustible Fibers and Flyings		Class III Fibers and Flyings	Not Applicable	IIIA <sup>3</sup>	165(329)	
				160(320)	T3C	
				135(275)	T4	T4
				120(248)	T4A	
				100(212)	T5	T5
				85(185)	T6	T6

Note 1: Group E is applicable to Class II, Division 1 only.  
 Note 2: Methane is a Group IIA Gas for non-mining applications.  
 Note 3: Group IIIA, IIIB and IIIC have not been adopted by the Canadian Electrical Code.

## Classification of Divisions and Zones

Hazard Level	Division Scheme	Zone Scheme	Definitions
Continuous Hazard	Division 1	Zone 0 / Zone 20	A place in which an explosive atmosphere is continually present
Intermittent Hazard		Zone 1 / Zone 21	A place in which an explosive atmosphere is likely to occur in normal operation
Hazard Under Abnormal Conditions	Division 2	Zone 2 / Zone 22	A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods

## IP Codes

1st No.	Solid Objects
0	No protection
1	Objects greater than 50mm
2	Objects greater than 12.5mm
3	Objects greater than 2.5mm
4	Objects greater than 1mm
5	Dust protected
6	Dust proof
2nd No.	Liquids
0	No protection
1	Vertically dripping
2	Dripping up to 15°
3	Limited spraying
4	Splashing from all directions
5	Hosing jets from all directions
6	Strong hosing jets from all directions
7	Temporary immersion
8	Continuous immersion
9	Steam-jet cleaning

## IK Ratings

IK Code	Level of Protection Achieved
IK00	Not protected
IK01	Protected against 0.14 joules impact
IK02	Protected against 0.2 joules impact
IK03	Protected against 0.35 joules impact
IK04	Protected against 0.5 joules impact
IK05	Protected against 0.7 joules impact
IK06	Protected against 1 joules impact
IK07	Protected against 2 joules impact
IK08	Protected against 5 joules impact
IK09	Protected against 10 joules impact
IK10	Protected against 20 joules impact

# RED SKY

SERIOUSLY SAFE LIGHTS™

## Authorised Distributor

daly  
Middle East

### Daly Middle East DWC LLC

☎ +971 4 887 2049  
📠 +971 4 887 8184  
✉ sales@daly-me.com

Building A3, Floor 1, Office 140, DWC,  
Dubai P.O. Box 712521

### Daly Middle East L.L.C.

☎ +971 4 887 2049  
📠 +971 4 887 8184  
✉ sales@daly-me.com

Plot 597-952, WH #3, Kamala Trading  
Compound, Dubai Investment Park 2, PO Box  
282131, Dubai, U.A.E.

Partners with offices in Qatar, Oman, Saudi Arabia & UK

### DME Trading and Maintenance WLL.

☎ +974 5023 1614  
Vipin Venugopalan  
✉ sales@daly-me.com

Al Shoumoukh Towers, Office 1041, Tower B, Floor 10,  
C-Ring Road, Al Sadd, PO Box 55896, Doha, Qatar

### DME Trading and Maintenance Limited

☎ +44 7881 663 047  
✉ sales@daly-me.com  
David Sheate

Point, 19 Oxford Road, Bournemouth, Dorset,  
United Kingdom, BH8 8GS

### Bin Moosa Trading and Contracting LLC.

☎ +968 2 411 1807  
☎ +968 9393 3601  
Mohammed Hanif  
✉ sales@daly-me.com

PO Box 1118, PC 1111, Muscat, Sultanate of Oman

### Yelma Trading Company

Yelma-Seal  
☎ +974 5023 1614  
Vipin Venugopalan  
✉ sales@daly-me.com  
Dhulum, As Sulay, Riyadh 14263, Saudi Arabia